

CWDM SFP Transceiver

With Digital Diagnostic Function

Features:

- Operating data rate at 1.25Gbps
- Single 3.3V Power supply and TTL Logic Interface
- Duplex LC Connector Interface
- Hot Pluggable
- Compliant with MSA SFP Specification SFF-8472
- Operating Case Temperature
- Standard: 0°C~70°C
- 1.0W maximum power consumption



Applications:

- Gigabit Ethernet Switches and Routers
- Other Optical Link

Product Description

The SFP CWDM optical transceivers are high performance, cost effective modules. They offer the customer a range of design options, including optional DDMI, standard or extend temperature ranges. They are designed to provide Gigabit Ethernet compliant connections. These transceivers are qualified in accordance with GR-468-CORE.

Ordering information

Part No. ^{+Note1}	Data Rate	Laser	Fiber Type	Distance	Optical Interface	Temp.	DDMI
TSC-GE10-XXDCR	1.25G	CWDM DFB	SMF	10km	LC	ST	YES
TSC-GE20-XXDCR	1.25G	CWDM DFB	SMF	20km	LC	ST	YES
TSC-GE40-XXDCR	1.25G	CWDM DFB	SMF	40km	LC	ST	YES
TSC-GE80-XXDCR	1.25G	CWDM DFB	SMF	80km	LC	ST	YES

Note1: XX refers to CWDM Wavelength range from 1271nm to 1611nm.

CWDM Wavelength

Band	XX	Wavelength
O-band Original	27	1271
	29	1291
	31	1311
	33	1331
	35	1351
E-band Extended	37	1371
	39	1391
	41	1411
	43	1431
	45	1451
S-band Short Wavelength	47	1471
	49	1491
	51	1511
	53	1531
C-band Conventional	55	1551
L-band Long Wavelength	57	1571
	59	1591
	61	1611

Regulatory Compliance

Feature	Standard	Performance
Electrostatic Discharge (ESD) to the Electrical Pins	MIL-STD-883G Method3015.7	Class 1C (>1000 V)
Electrostatic Discharge to the enclosure	EN 55024:1998+A1+A2 IEC-61000-4-2 GR-1089-CORE	Compliant with standards
Electromagnetic Interference (EMI)	FCC Part 15 Class B EN55022:2006 CISPR 22B :2006 VCCI Class B	Compliant with standards Noise frequency range: 30 MHz to 6 GHz. Good system EMI design practice required to achieve Class B margins. System margins depend on customer host board and chassis design.
Immunity	EN 55024:1998+A1+A2 IEC 61000-4-3	Compliant with standards. 1kHz sine-wave, 80% AM, from 80 MHz to 1 GHz. No effect on transmitter/receiver performance is detectable between these limits.
Laser Eye Safety	FDA 21CFR 1040.10 and 1040.11 EN (IEC) 60825-1:2007 EN (IEC) 60825-2:2004+A1 EN (IEC) 60950-1:2006+A1+A11+A12	CDRH compliant and Class I laser product. TUV Certificate No. R50271605
Component Recognition	UL and CUL EN60950-1:2006	TUV Certificate No. E344594 (CB:JPTUV-053877)
RoHS2.0	20011/65/EU	Compliant with standards

Absolute Maximum Ratings*^{Note3}

Parameter	Symbol	Min	Max	Unit
Storage Temperature	T _S	-40	+85	°C
Supply Voltage	V _{CC}	0	3.6	V
Operating Humidity	-	5	95	%

Note3: Exceeding any one of these values may destroy the device permanently.

Recommended Operating Conditions

Parameter	Symbol	Min	Typical	Max	Unit	Notes
Operating Case Temperature	T _C	0		70	°C	
Power Supply Voltage	V _{CC}	3.14	3.3	3.47	V	
Supply Current	I _{CC}			300	mA	

Performance Specifications – Electrical

Parameter	Symbol	Min	Typ.	Max	Unit	Notes
Transmitter						
CML Inputs(Differential)	V _{in}	500		2400	mVpp	AC coupled inputs
Input Impedance (Differential)	Z _{in}		100		ohm	R _{in} > 100 ohms @DC
Tx_DISABLE Input Voltage – High		2		V _{cc}	V	
Tx_DISABLE Input Voltage – Lo		0		0.8	V	
Tx_FAULT Output Voltage – High		2		V _{cc}	V	
Tx_FAULT Output Voltage – Low		0		0.8	V	
Receiver						
CML Outputs (Differential)	V _{out}	700		1600	mVpp	AC coupled outputs
Output Impedance (Differential)	Z _{out}		100		ohm	
Rx_LOS Output Voltage – High		2			V	OC output, should be pull up with 4.7K – 10 KΩ on the host board
Rx_LOS Output Voltage – Low		0		0.5	V	
MOD_DEF (0:2)	V _{OH}	2.5			V	With Serial ID
	V _{OL}	0		0.5	V	

I/O Timing for Control & Status Functions Timing

Parameter	Symbol	Min	Typ.	Max	Unit
TX Disable Assert Time	t _{off}			10	us
TX_DISABLE Negate Time	t _{on}			1	ms
Time to initialize, include reset of TX_FAULT	t _{init}			300	ms
TX Fault Assert Time	t _{fault}			100	us
TX Disable to reset	t _{reset}	10			us
LOS Assert Time	t _{loss_on}			100	us
LOS De-Assert Time	t _{loss_off}			100	us

Performance Specifications – Optical

(1.25Gbps10–20km)

Parameter	Symbol	Min	Typ.	Max	Unit	Note
Transmitter						
Centre Wavelength	λ _c	XX-6.5	XX	XX+6.5	nm	XX:Note1
Spectral Width* ^{Note4}	Δλ			1	nm	
Average Output Power	P _{OUT}	-9		0	dBm	
Extinction Ratio	ER	8.2			dB	
Side Mode Suppression Ratio	SMSR	30			dB	

Average Power of OFF Transmitter	P_{OFF}	-45	dBm		
Output Optical Eye	Compliant with IEEE 802.3ah-2004				
Receiver					
Centre Wavelength	λ_c	1100	1650	nm	
Sensitivity* ^{Note5}	P_{in}		-24	dBm ST	
Receiver Overload	Overload	0	dBm		
Optical Return Loss		12	dB		
LOS Assert	LOSA	-35	dBm		
LOS De-Assert	LOSD		-23	dBm ST	
LOS Hysteresis		0.5	4	dB	

(1.25Gbps40km)

Parameter	Symbol	Min	Typ.	Max	Unit	Note
Transmitter						
Centre Wavelength	λ_c	XX-6.5	XX	XX+6.5	nm	XX:Note1
Spectral Width* ^{Note4}	$\Delta\lambda$			1	nm	
Average Output Power	P_{OUT}	-5		0	dBm	
Extinction Ratio	ER	8.2			dB	
Side Mode Suppression Ratio	SMSR	30			dB	
Average Power of OFF Transmitter	P_{OFF}			-45	dBm	
Output Optical Eye	Compliant with IEEE 802.3ah-2004					
Receiver						
Centre Wavelength	λ_c	1100		1650	nm	
Sensitivity* ^{Note5}	P_{in}			-25	dBm	ST
Receiver Overload	Overload	0			dBm	
Optical Return Loss		12			dB	
LOS Assert	LOSA	-35			dBm	
LOS De-Assert	LOSD			-25	dBm	ST
LOS Hysteresis		0.5		4	dB	

(1.25Gbps80km)

Parameter	Symbol	Min	Typ.	Max	Unit	Note
Transmitter						
Centre Wavelength	λ_c	XX-6.5	XX	XX+6.5	nm	XX:Note1
Spectral Width* ^{Note4}	$\Delta\lambda$			1	nm	
Average Output Power	P_{OUT}	0		5	dBm	
Extinction Ratio	ER	8.2			dB	
Side Mode Suppression Ratio	SMSR	30			dB	
Average Power of OFF Transmitter	P_{OFF}			-45	dBm	

Output Optical Eye	Compliant with IEEE 802.3ah-2004			
Receiver				
Centre Wavelength	λ_c	1100	1650	nm
Sensitivity* ^{Note5}	Pin		-28	dBm
Receiver Overload	Overload	0		dBm
Optical Return Loss		12		dB
LOS Assert	LOSA	-38		dBm
LOS De-Assert	LOSD		-29	dBm
LOS Hysteresis		0.5	4	dB

Note4: DFB LD measured spectral width –20dB.

Note5: Minimum average optical power measured at the BER less than 1E-12@pattern is PRBS2⁷-1@ER=9dB.

Note6: Minimum average optical power measured at the BER less than 1E-10@pattern is PRBS2²³-1@ER=10dB.

SFP Transceiver Electrical Pad Layout

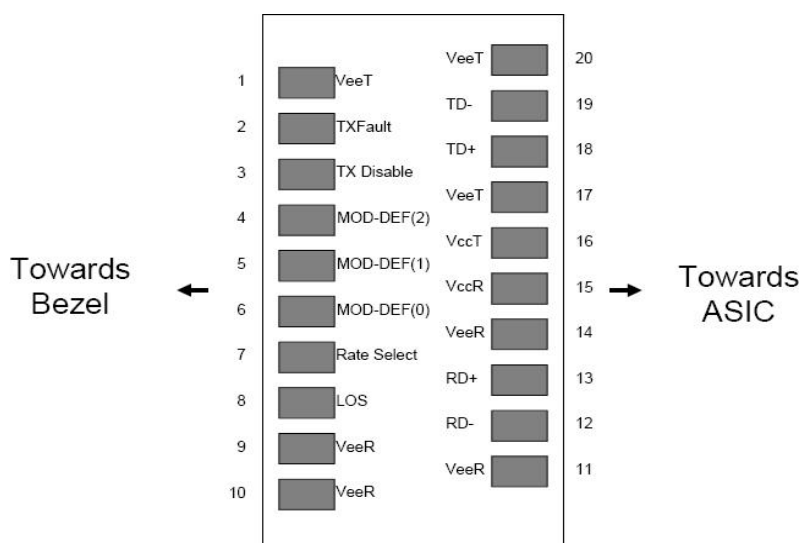


Diagram of Host Board Connector Block Pin Numbers and Names

Pin Function Definitions:

Pin Num.	Name	Function	Plug Seq.	Notes
1	VeeT	Transmitter Ground	1	Note 11
2	TX Fault	Transmitter Fault Indication	3	Note 7
3	TX Disable	Transmitter Disable	3	Note 8, Module disables on high or open.
4	SDA	Module Definition 2	3	2-wire Serial Interface Data Line.
5	SCL	Module Definition 1	3	2-wire Serial Interface Clock.
6	MOD-ABS	Module Definition 0	3	Note 9
7	RS0	RX Rate Select (LVTTTL).	3	NC. Function not available
8	LOS	Loss of Signal	3	Note 10

9	RS1	TX Rate Select (LVTTTL).	1	NC. Function not available
10	VeeR	Receiver Ground	1	Note 11
11	VeeR	Receiver Ground	1	Note 11
12	RD-	Inv. Received Data Out	3	Note 12
13	RD+	Received Data Out	3	Note 13
14	VeeR	Receiver Ground	1	Note 11
15	VccR	Receiver Power	2	3.3V ± 5%, Note 13
16	VccT	Transmitter Power	2	3.3V ± 5%, Note 13
17	VeeT	Transmitter Ground	1	Note 11
18	TD+	Transmit Data In	3	Note 14
19	TD-	Inv. Transmit Data In	3	Note 14
20	VeeT	Transmitter Ground	1	Note 11

Note7: TX Fault is an open collector/drain output, which should be pulled up with a 4.7K – 10K_Ω resistor on the host board. Pull up voltage between 2.0V and VccT/R+0.3V. When high, output indicates a laser fault of some kind. Low indicates normal operation. In the low state, the output will be pulled to < 0.8V.

Note8: TX disable is an input that is used to shut down the transmitter optical output. It is pulled up within the module with a 4.7K – 10 K_Ω resistor. Its states are: Low (0 – 0.8V): Transmitter on (>0.8, < 2.0V): Undefined. High (2.0 – 3.465V): Transmitter Disabled. Open: Transmitter Disabled.

Note9: Module Absent, connected to VeeT or VeeR in the module.

Note10: LOS (Loss of Signal) is an open collector/drain output, which should be pulled up with a 4.7K –10K_Ω resistor. Pull up voltage between 2.0V and VccT/R+0.3V. When high, this output indicates the received optical power is below the worst-case receiver sensitivity (as defined by the standard in use). Low indicates normal operation. In the low state, the output will be pulled to < 0.8V.

Note11: The module signal ground contacts, VeeR and VeeT, should be isolated from the module case.


Note12: RD-/+: These are the differential receiver outputs. They are AC coupled 100_Ω differential lines which should be terminated with 100_Ω (differential) at the user SERDES. The AC coupling is done inside the module and is thus not required on the host board.

Note13: VccR and VccT are the receiver and transmitter power supplies. They are defined as 3.3V ±5% at the SFP connector pin. Maximum supply current is 300mA. Inductors with DC resistance of less than 1 ohm should be used in order to maintain the required voltage at the SFP input pin with 3.3V supply voltage. When the recommended supply-filtering network is used, hot plugging of the SFP transceiver module will result in an inrush current of no more than 30mA greater than the steady state value. VccR and VccT may be internally connected within the SFP transceiver module.

Note14: TD-/+: These are the differential transmitter inputs. They are AC-coupled, differential lines with 100_Ω differential termination inside the module. The AC coupling is done inside the module and is thus not required on the host board.

Digital Diagnostic Functions:

- 1) SFP transceiver supports the 2-wire serial communication protocol as defined in SFP MSA: in which defines a 256-byte memory map in EEPROM at 8 bit address 1010000X (A0h). The digital diagnostic monitoring interface be assigned with 8 bit address 1010001X (A2h). Additionally, SFP transceivers provide a unique digital diagnostic monitoring interface (DDMI), which allows real-time access to product operating parameters such as transceiver supply voltage, transceiver temperature, transmitted optical power, laser bias current and received optical power. It also defines alarm and warning threshold, which alerts end-users when particular operating parameters are outside of factory setting.
- 2) When the serial protocol is activated, the serial clock signal (SCL, Mod Def 1) is generated by the host. The positive edge clocks data into those segments of the EEPROM that are not write-protected. The negative edge clocks data from the SFP transceiver. The serial data signal (SDA, Mod Def 2) is bi-Directional for serial data transfer. The host uses SDA in conjunction with SCL to mark the start and end of serial protocol activation. The memories are organized as a series of 8-bit data words that can be addressed individually or sequentially.

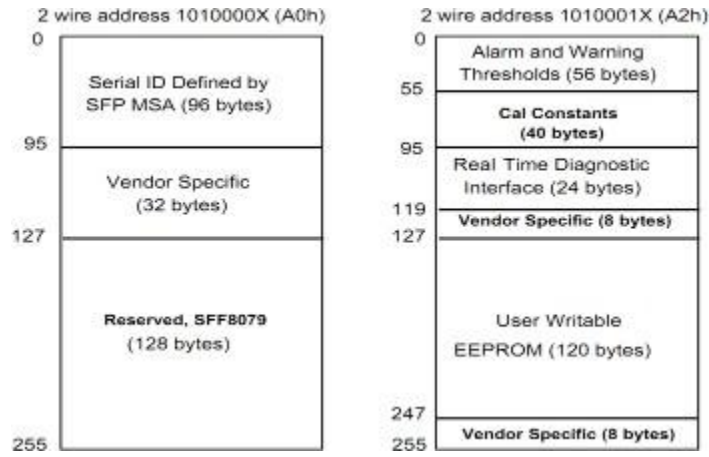

Digital Diagnostic Monitoring Specifications

- 1) Additionally, SFP transceivers TSC-xxxx-xxDxR^{*Note15} provide a unique digital diagnostic monitoring interface (DDMI) be assigned with 8 bit address 1010001X (A2h) as defined in SFP MSA , which allows real-time access to product operating parameters such as transceiver supply voltage, transceiver temperature, transmitted optical power, laser bias current and received optical power. It also defines alarmandwarningthreshold,whichalerts send-userswhenparticularoperatingparametersareoutside of factorysetting.
- 2) Digital diagnostics for the TSC-xxxx-xxDxR are internally calibrated by default. Calibration and alarm/warning threshold data is written during devicemanufacturing.

Monitor accuracy


Parameter	Min	Typ	Max	Units
Internally measured transceiver temperature			±3	°C
Internally measured transceiver supply voltage			±3%	V
Measured TX bias current			±10	%
Measured TX output power			±3	dB
Measured RX received average optical power			±3	dB

Dynamic range for operation


Parameter	H-Alarm	H-warning	L-Warn g	L- Alarm	Units	Note
Internally measured transceiver temperature	+80	+73	-3	-10	°C	
Internally measured transceiver supply voltage	3.63	3.47	3.13	2.97	V	
Measured TX bias current	100	90	10	5	mA	
Measured TX output power	Pout_max+3	Pout_max+2	Pout_min-2	Pout_min-3	dBm	
Measured RX received average optical power	Overload+3	Overload+2	P _{IN} -2	P _{IN} -3	dBm	

Note15: TSC-xxxx-xxxxR provides an EEPROM addressed 1010000X (A0h) as defined in SFP MSA, and only TSC-xxxx-xxDxR is compliant with digital diagnostic monitoring interface (DDMI) be assigned with 8 bit address 1010001X (A2h) .



Recommended Circuit

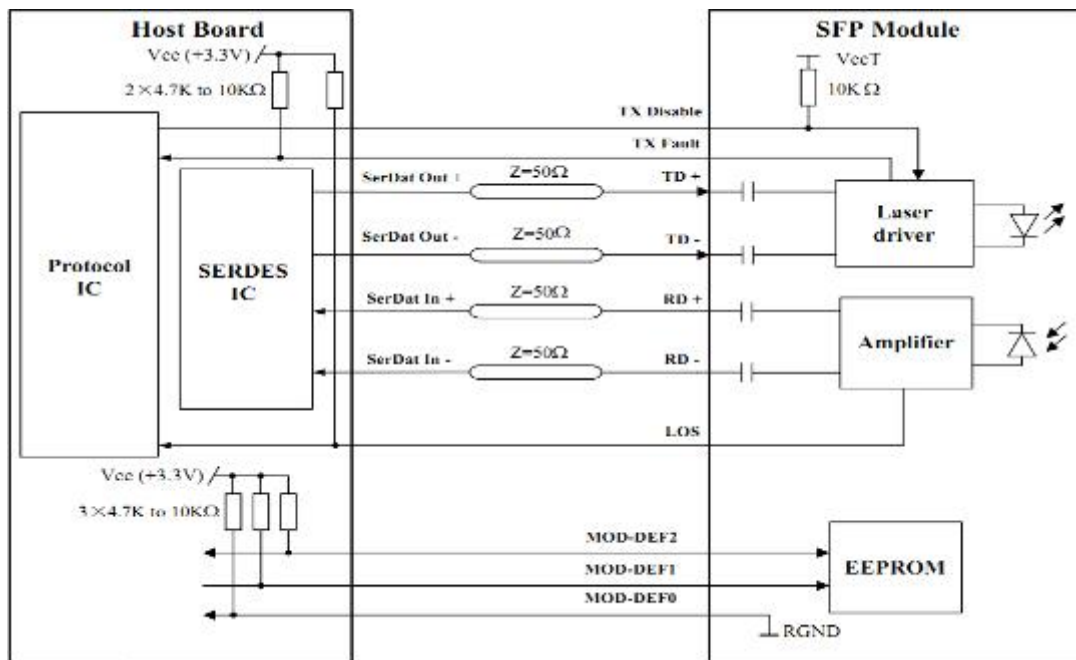

Mechanical Dimension

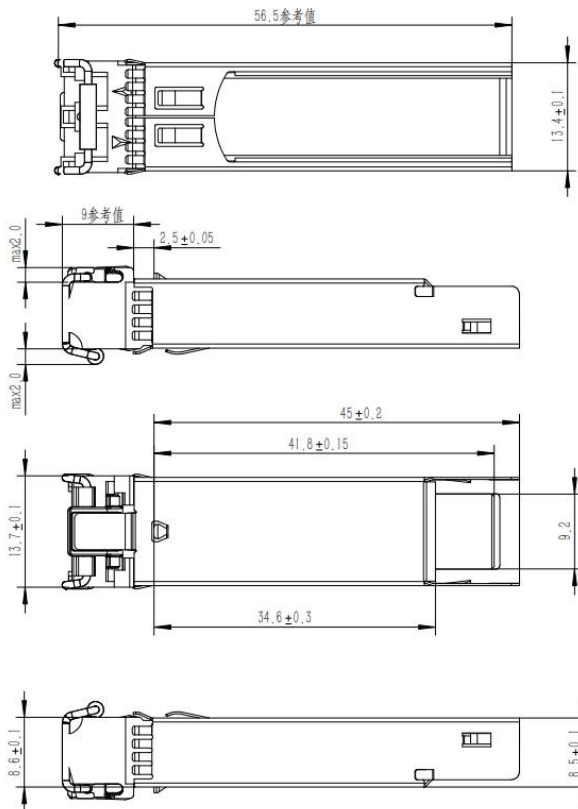

Unit: mm

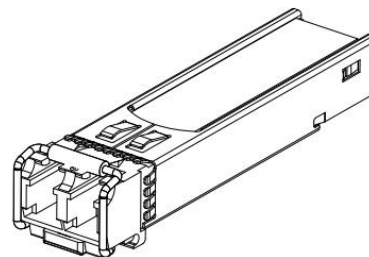

Eye Safety

This single-mode transceiver is a Class 1 laser product. It complies with IEC-60825 and FDA 21 CFR 1040.10 and 1040.11. The transceiver must be operated within the specified temperature and voltage limits. The optical ports of the module shall be terminated with an optical connector or with a dust plug.

Obtaining Document

You can visit our website: <http://www.trixontech.com>

Or contact Trixon Inc. listed at the end of the documentation to get the latest document.

Notice

Trixon reserves the right to make changes to or discontinue any optical link product or service identified in this publication, without notice, in order to improve design and/or performance.

Applications that are described herein for any of the optical link products are for illustrative purposes only. Trixon makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Add: # 202, Section A, Building 1 No.209, Sanshe Road, Jinjiang District Industry Park Chengdu
610063. Sichuan P.R. CHINA

Tel: (+86) 028-85925400/Fax: (+86) 028-85925445

E-mail: info@trixontech.com

<http://www.trixontech.com>

© Copyright Trixon 2014 all rights reserved.

